

Addendum for Divar MR Operation manual

This addendum must be used by the Divar MR Operation manual P/N: MFL40426629.

3.15 PTZ camera control

You can control the cameras connected via the biphase port and data port RS-422/485 terminal. You must set the configuration between the PTZ camera and the DVR.

1. Select the PTZ camera channel on monitor A you want to control.
2. Press PTZ or click the PTZ icon in the system control bar. PTZ virtual remote control is displayed on monitor A.
3. Use each item to control the PTZ camera.

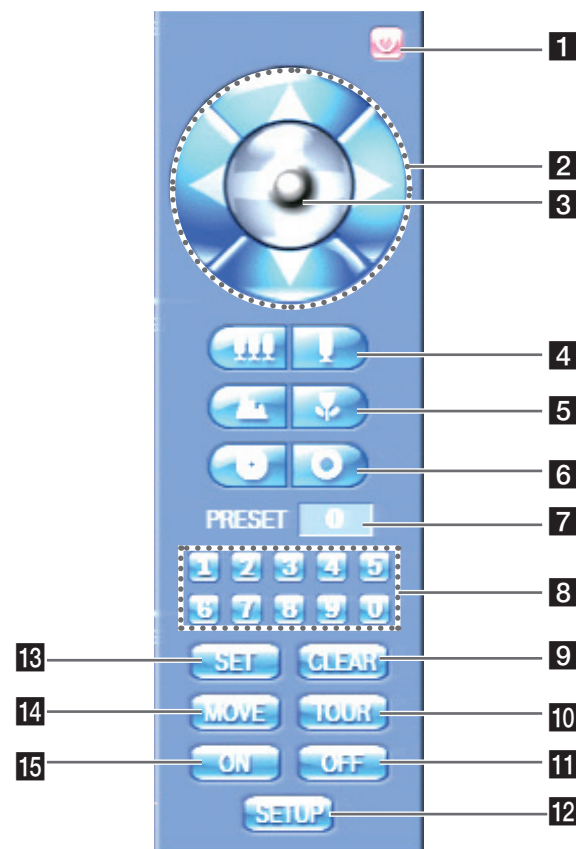





Figure 3.11 The PTZ virtual remote control.

	Button	Function
1		Remove the PTZ virtual remote control.
2		Use to pan/tilt the camera.
3		Confirm the preset position.



4		Adjust the camera zoom.
5		Manually adjust the focus of a camera.
6		Manually adjust the iris of a camera.
7		Displays the Selected Preset Number
8		Input the preset number.
9		Delete a memorized preset position.
10		Start a preset tour.
11		Sends the Aux OFF command. (Used only for BOSCH Auto Dome camera).
12		Display the setup menu of the PTZ camera. (Except BOSCH PTZ camera).
13		Register preset positions.
14		Move the camera to the preset position.
15		Sends the Aux ON command. (Used only for BOSCH Auto Dome camera).

Table 3.5 The PTZ virtual remote control button function table

3.15.6 Setup for PTZ cameras

You can adapt the camera to your requirements by setting up the respective items in menus.

1. Click the [SETUP] icon.
The setup menu appears in the selected window of the main monitor.
2. Use arrows, ZOOM +/- and ENTER buttons to set the options.

Notes:



- Refer to the manuals of the PTZ camera for more details.
- Some PTZ cameras may not operate correctly with this unit.
- You cannot control the other functions when the PTZ virtual remote control is displayed.
- If you use the BOSCH PTZ camera that use the Bosch protocol, the SETUP icon is not displayed on the PTZ virtual remote control.

3.15.7 To send the Aux On/Off commnd

1. Click the [ON] or [OFF] icon.
2. Enter the Aux command number of the BOSCH Auto Dome camera.
3. Click the icon to send the Aux commnd.

P/N: MBM48113801
 © 2008 Bosch Security Systems B.V.
 Subject to change.